




230/400 V AC	 U_i 500 V	 Cu	 PA6.6	IP 20	T_a -40...+85°C	 35x7.5	V1 UL94
-----------------	---	---	--	-----------------	-------------------------------------	---	-------------------

TRACON	 (mm)	x 	I_n	 mm ²	L (mm)	H (mm)	W (mm)	d (mm)	 M	
NPE-ZB		12			88	26	13	5,5	M5	
NPE-ZG	6 × 9	12	max. 63 A	2,5-16 2,5-10	88	26	13	5,5	M5	
NPE-ZBK		12			88	26	13	5,5	M5	



TRACON	 (mm)	x 	I_n	 mm ²	L (mm)	H (mm)	W (mm)	d (mm)	 M	
NPE-Z-24*	6 × 9	24	max. 63 A	2,5-16 2,5-10	250	18,3	7,6	4×5,4+20×4,3	M4×20+M5×4	
NPE-Z-38*	8 × 12	38	max. 100 A	4-25 2,5-16	360	26,6	13,7	10×7,5+28×5,2	M6×10+M5×28	

* na montážní desku

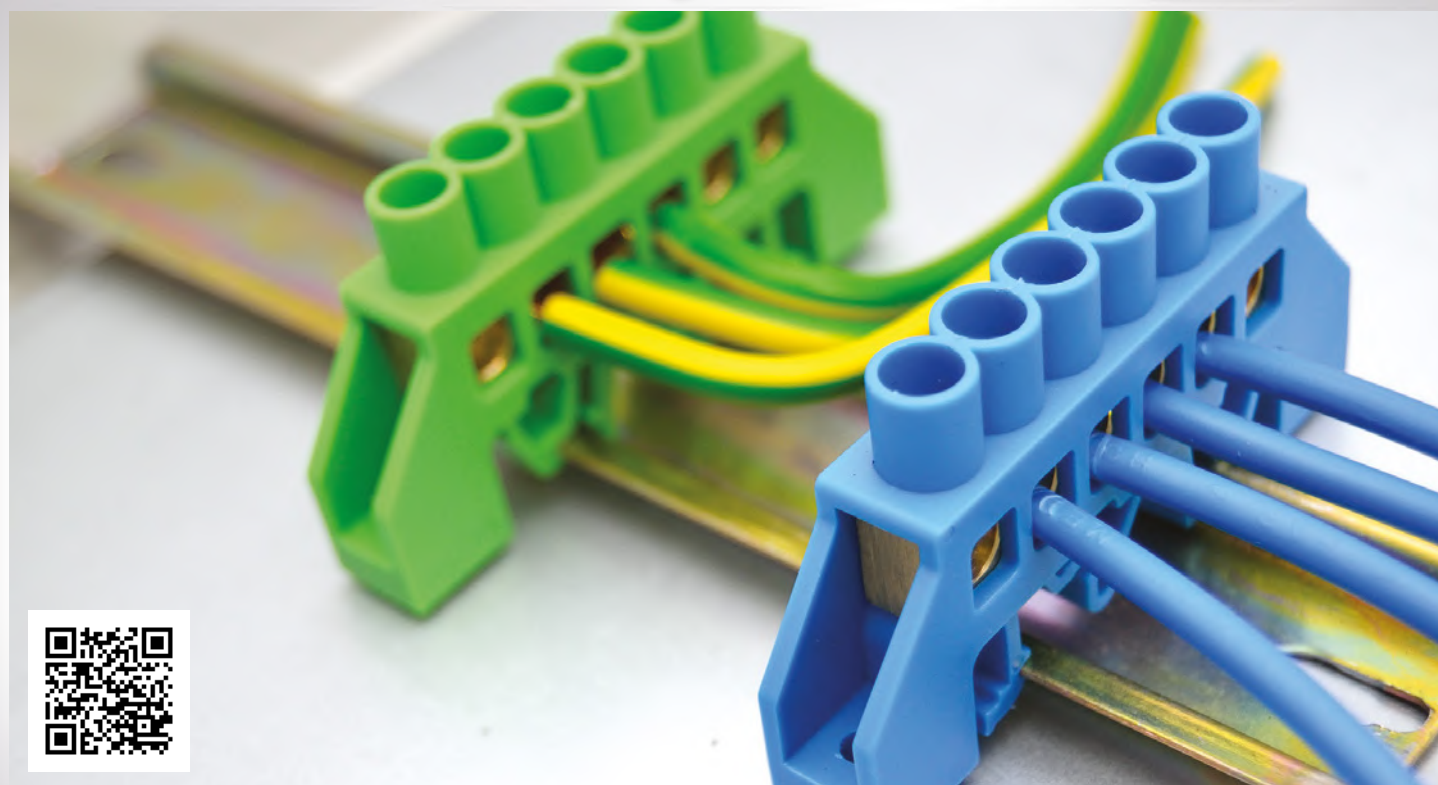

TRACON
ELECTRIC®

TRACON ELECTRIC s.r.o., Pražská 816, 286 01 Čáslav • Tel.: 774 432 551
www.traconelectric.com • praha@traconelectric.cz

Další informace u našich prodejců!