













Ruční hydraulické lisy

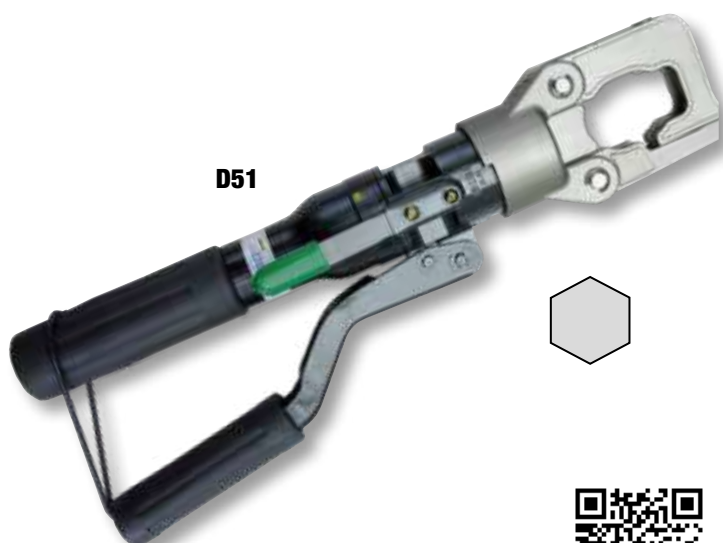
TRACON		 mm ²	 kN max			 m
D31*		4-95	35	360°	200 mm	1.550 g
D51*		10-185	55	180°	365 mm	2.500 g
D52F*		10-240	67	180°	375 mm	2.800 g

* Příslušenství: Plastový přenosný kufřík




 **Vysvětlivky piktogramů** **B/0**


Čelistní vložky (páry) k hydraulickému lisu D31

TRACON		Cu  mm ²	Al  mm ²
D31-4	KZ 4	4	-
D31-6	KZ 5	6	4
D31-10	KZ 6	10	6
D31-16	KZ 8	16	10
D31-25	KZ 10	25	16
D31-35	KZ 12	35	25
D31-50	KZ 14	50	35
D31-70	KZ 16	70	50
D31-95	KZ 18	95	70





Čelistní vložky (páry) k hydraulickému lisu D51

TRACON		Cu  mm ²	Al  mm ²
D51-10-120	KZ 6	10	6
	KZ 20	120	95
D51-16-70	KZ 8	16	10
	KZ 16	70	50
D51-25-95	KZ 10	25	16
	KZ 18	95	70
D51-35-50	KZ 12	35	25
	KZ 14	50	35
D51-150	KZ 22	150	120
D51-185	KZ 25	185	150













Čelistní vložky (páry) k hydraulickému lisu D52F

TRACON	Cu  mm ²	Al  mm ²
D52F-1016	10-16	10
D52F-2535	25-35	16-25
D52F-5070	50-70	50-35
D52F-95120	95-120	70-95
D52F-150	150	120
D52F-185	185	150
D52F-240	240	185



Ruční hydraulické lisy

TRACON		 mm ²	 kN _{max}			
C120F*		16-400	120	180°	590 mm	7.000 g
C130L*		10-300	130	320°	580 mm	6.500 g
KHP70**		4-70	50	–	375 mm	3.000 g
KHP240**		16-240	120	–	480 mm	6.250 g



* Příslušenství: Plastový přenosný kufřík

** Příslušenství: Plastový přenosný kufřík + lisovací čelisti

KHP70 čelisti: 4,6,10,16,25,32,50,70



KHP240 čelisti: 25,35,50,95,120,150,185,20,300

Čelistní vložky (páry) k hydraulickému lisu C120F

TRACON	Cu  mm ²	Al  mm ²
C120F-16	16	-
C120F-25	25	16
C120F-35	35	25
C120F-50	50	35
C120F-70	70	50
C120F-95	95	70
C120F-120	120	95
C120F-150	150	120
C120F-185	185	150
C120F-240	240	185
C120F-300	300	240
C120F-400	400	300



Čelistní vložky (páry) k hydraulickému lisu C130L

	Cu  mm ²	Al  mm ²
C130L-10	10	6
C130L-16	16	-
C130L-25	25	16
C130L-35	35	25
C130L-50	50	35
C130L-70	70	50
C130L-95	95	70
C130L-120	120	95
C130L-150	150	120
C130L-185	185	150
C130L-240	240	185
C130L-240K*	240	185
C130L-300	300	240



* Čelistní vložka pro typ kabelu: laněný

